



模组规格	伺服		丝杠		最大速度 (mm/s)	最大负载(水平) (KG)	最大负载(垂直) (KG)	重复定位精度 (mm)	行程		
	W	外径d	导程l						最小行程	最大行程	
MSX	45	100	12	5	L	250	6	2	±0.02	100	800
		100	12	10	N	500	2	1	±0.02	100	800
		200	12	5	L	250	30	16	±0.02	100	800
		200	12	10	N	500	15	6	±0.02	100	800
	65	200	16	5	L	250	26	11	±0.02	100	1200
		200	16	10	N	500	8	4	±0.02	100	1200
		200	16	16	H	800	3	2	±0.02	100	1200
		400	16	5	L	250	123	53	±0.02	100	1200
	84	400	16	10	N	500	38	21	±0.02	100	1200
		400	16	16	H	800	16	10	±0.02	100	1200
		200	20	5	L	250	20	12	±0.02	100	900
		200	20	10	N	500	14	9	±0.02	100	900
		200	20	20	H	1000	5	3	±0.02	100	900
		400	20	5	L	250	40	16	±0.02	100	900
		400	20	10	N	500	21	12	±0.02	100	900
		400	20	20	H	1000	8	5	±0.02	100	900

备注：L-低速250mm/s；N-中速500mm/s；H-高速1000mm/s

MSX45

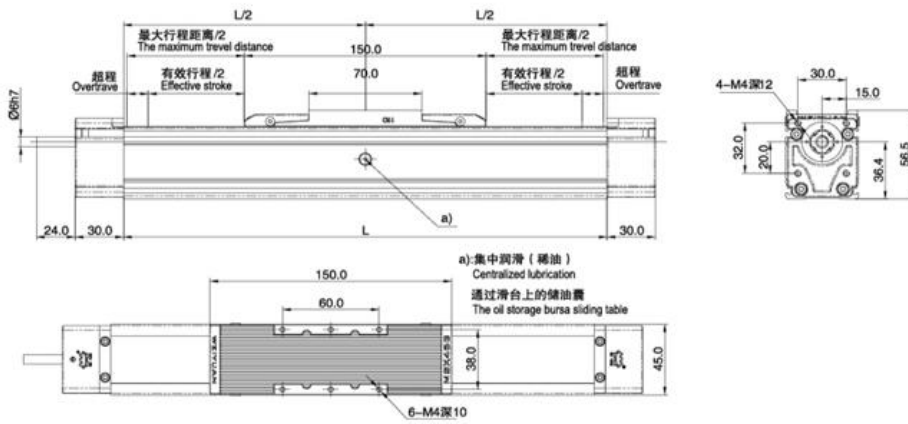

MSX65

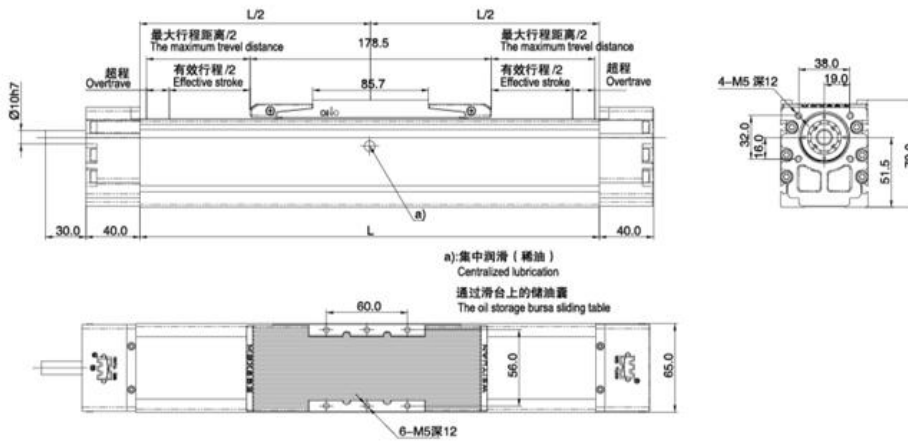

MSX84

