


型号 Model MSX45 MSX65 MSX84

规格 Specification	单位 Unit	MSX84	安装方式 Installation Way	导轨 Lead	负载 Load	Almm	Blmm	Clmm
MSX84-MF		MSX84-MIL/R/U/D	水平安装 Horizontal Use	5	40 600 0 0	20 600 72 40	10 15 600 52 30	20 5 600 104 90
输出功率 Rated Output	W	200/400W, 3000min ⁻¹	垂直安装 Wall Installation Use	5	40 0 0 0	20 40 40 600	10 15 30 30 600	20 5 90 90 600
最大速度 Max.Speed	mm/s	250(500/1000)	垂直安装 Vertical Use	5	40 0 0 0	20 40 40 600	10 15 30 30 600	20 5 90 90 600
最大负载 Max.Load	kg	H ₁ : 20(14/5) H ₂ : 40(21/8) V ₁ : 12(9/3) V ₂ : 16(12/5)	垂直安装 Vertical Use	5	40 0 0 0	20 40 40 600	10 15 30 30 600	20 5 90 90 600
有效行程 Stroke Range	mm	100-900	垂直安装 Vertical Use	5	40 0 0 0	20 40 40 600	10 15 30 30 600	20 5 90 90 600
定位精度 Repeatability	mm	±0.02	垂直安装 Vertical Use	5	40 0 0 0	20 40 40 600	10 15 30 30 600	20 5 90 90 600
驱动方式 Drive Type		丝杠 BALL SCREW	垂直安装 Vertical Use	5	40 0 0 0	20 40 40 600	10 15 30 30 600	20 5 90 90 600

MSX84

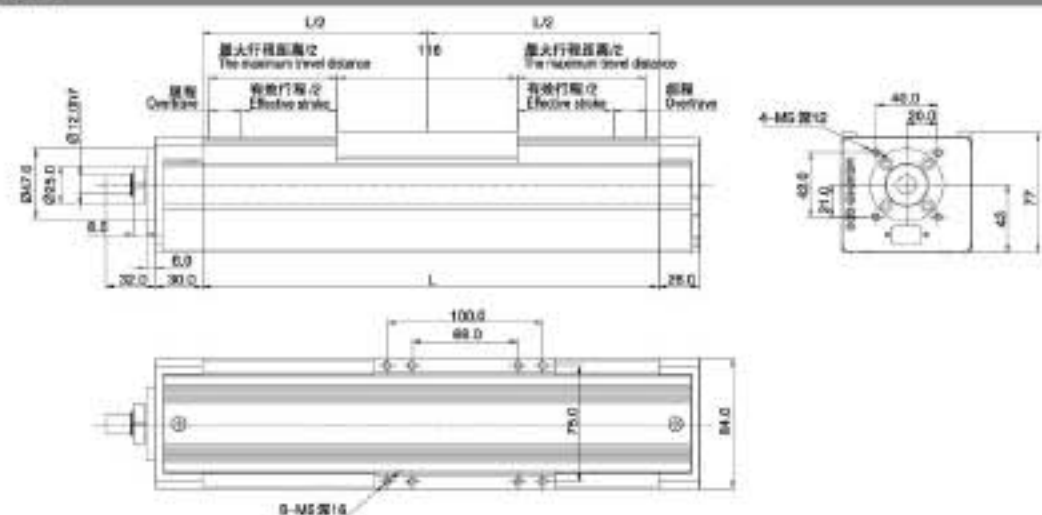

Weight	Stroke Model	单位 Units	Stroke (mm)								
			100	200	300	400	500	600	700	800	900
MSX84-1P	kg	2.199	2.9578	3.377	4.4758	5.2348	5.9938	6.7528	7.5118	8.2708	
	kg	2.428	3.2418	4.008	4.7598	5.5188	6.2778	7.0368	7.7958	8.5548	
	kg	2.428	3.2418	4.008	4.7598	5.5188	6.2778	7.0368	7.7958	8.5548	
Speed	Stroke Model	单位 Units	Speed (mm/s)								
			100	200	300	400	500	600	700	800	900
			MSX84-MF-L	mm/s							
MSX84-MF-N	mm/s								500		
MSX84-MF-H	mm/s								1000		

注意: (CAUTION)

1、模组长重不包括, 电机座、电机、联轴器、感应开关及开关座等附件。


1. Motor, coupling, bellows cover, motor mount, switches or cable decr are not included in weight calculator.

2、超过规定行程, 速度需要下降, 具体和良可技术中心联系!


2. Decelerate if stroke is exceeded, please contact us for more details.

型号 Model MSX45 MSX65 MSX84

固定面板 Fixed board

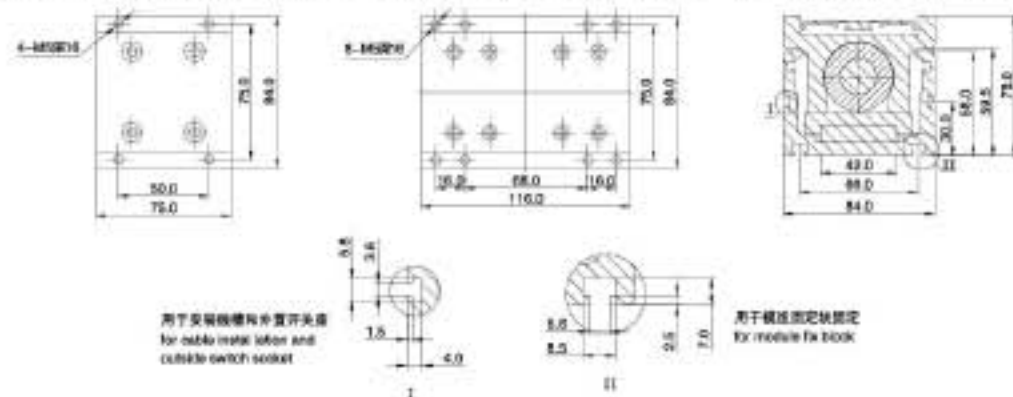—用于带一个短滑台的面板尺寸
—size of panel with single short carriage—用于带一个长滑台的面板尺寸
—size of panel with single long carriage—用于安装开关和固定系统的尺寸
—size of switch installation and fix system用于安装螺帽和内置开关座
for cable metal nut and
cable switch socket用于螺柱固定板
for module fix block

MSX84 电机连接器 Motor socket

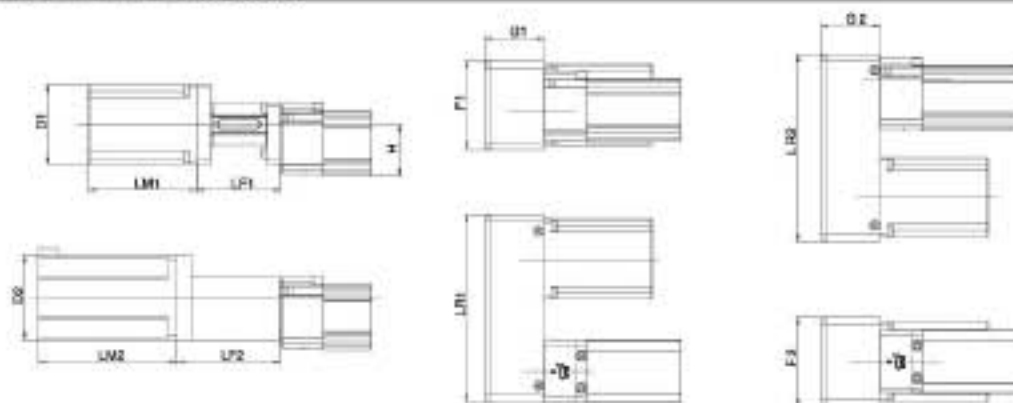

款式 Model	伺服电机 AC Servo		步进电机 Stepping Motor		尺寸 (mm) Size														
	品牌 Brand	功率 Power	品牌 Brand	法兰 Flange	D1	D2	LM1	LM2	带制动 with	无制动 without	LF1	LF2	LR1	LR2	F1	F2	G1	G2	H
MR ML MU MD	松下	400W	雷赛	57	57	60	79	99	135					153	153	63	63	42	42
	台达	400W	杰美康	57	57	60	81	131	167					153	153	63	63	42	42
	安川	400W								125				153		63		42	
	富士	400W								125	163			153		63		42	
	英威腾	400W								135	165			153		63		42	
MF					57	60	79			参照上格		73	73						
					96	80	127			参照上格		87	87						